

## Obvius NEMA 4X Bundles

### OBVIUS NEMA 4X BUNDLES

Obvius NEMA 4X bundles incorporate all the functionality of Obvius products in a water tight NEMA 4X enclosure. The Obvius NEMA 4X bundles allow users to install Obvius products and third party devices in outdoor or industrial environments. Designed to be used with various combinations of Obvius products and third party devices, the Obvius NEMA 4X bundles allow for a multitude of configuration options.

### PRODUCT CONFIGURATION OPTIONS

- **AcquiLite EMB (A7810), plus:**

- GSM Cellular Modem



AcquiLite EMB (A7810) & cellular modem

- **AcquiSuite EMB (A8810), plus one of the following:**

- GSM Cellular Modem
- Flex I/O ((A8332-8F2D)
- HD Pulse Module (A8911-23)
- ModHopper (R9120-XT)



AcquiSuite EMB (A8810) + Flex I/O (A8332)

- **ModHopper (R9120-XT), plus one of the following:**

- Flex I/O (A8332-8F2D)
- HD Pulse Module (A8911-23)



ModHopper (R9120-XT) + AcquiSuite EMB (A8810)

### ABOUT OBVIUS

Obvius manufactures data acquisition and wireless connectivity products specifically for energy management. We deliver cost-effective, reliable hardware designed to speed up installation. Our products are based on an open architecture allowing our customers to collect and log energy information from virtually any meter or sensor. The ability to support multiple communication options provides remote access to all your energy information. Founded in 2003, Obvius is located in Tualatin, Oregon. We serve a global clientele and continue to drive innovation by simplifying data collection.

### SOLUTIONS

- Data Acquisition
- Wireless Communication
- Meters & Sensors
- Custom Packaged Solutions
- Integration & Software Partners

### HEADQUARTERS

Tualatin, Oregon



### CONTACT US

sales@obvius.com

## AcquiSuite EMB A8810 NEMA Bundles

	A8810-R91203	A8810-R91205	A8810-Flex	A8810-HD
<b>Input Power</b>				
Voltage	100-240VAC	100-240VAC	100-240VAC	100-240VAC
Current	0.7-0.4A	0.8-0.55A	0.7-0.4A	0.7-0.4A
Frequency	47-63Hz	47-63Hz	47-63Hz	47-63Hz
<b>Output Power</b>				
Voltage	24VDC	24VDC	24VDC	24VDC
Current Provided	1.1A	1.5A	1.1A	1.1A
Available Current	400mA	100mA	400mA	400mA
<b>Enclosure</b>				
Rating	NEMA 4X	NEMA 4X	NEMA 4X	NEMA 4X
Dimensions (L x W x H)	10.43 x 7.28 x 3.74 in	10.43 x 7.28 x 3.74 in	10.43 x 7.28 x 3.74 in	10.43 x 7.28 x 3.74 in

Power supply is included.

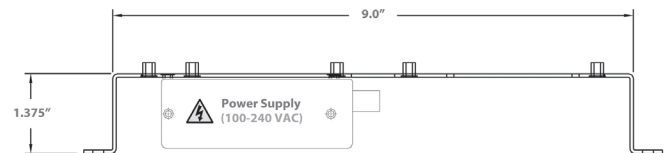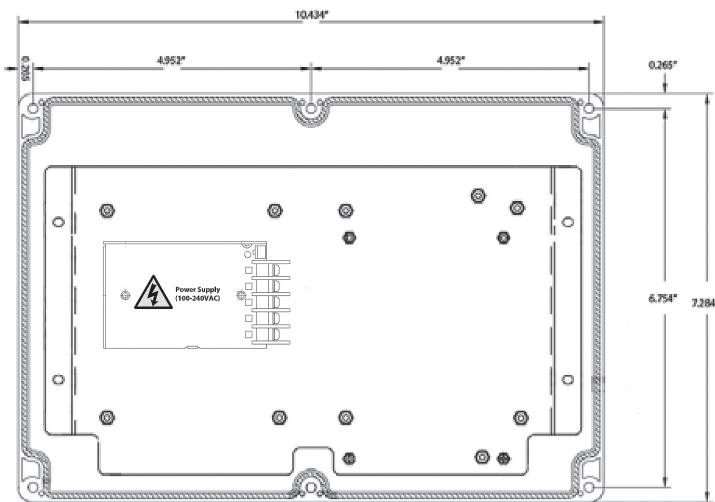

\*Enclosures do not include conduit knockout or fittings.



Obvius  
20497 SW Teton Avenue  
Tualatin, OR 97062

503 601 2099  
866 204 8134 (USA only)  
sales@obvius.com

Find Quality Products Online at:

[www.GlobalTestSupply.com](http://www.GlobalTestSupply.com)

sales@GlobalTestSupply.com