




Series
MTL7706/
7787

Zener Barrier

Intrinsically Safe Barriers for Hazardous Locations

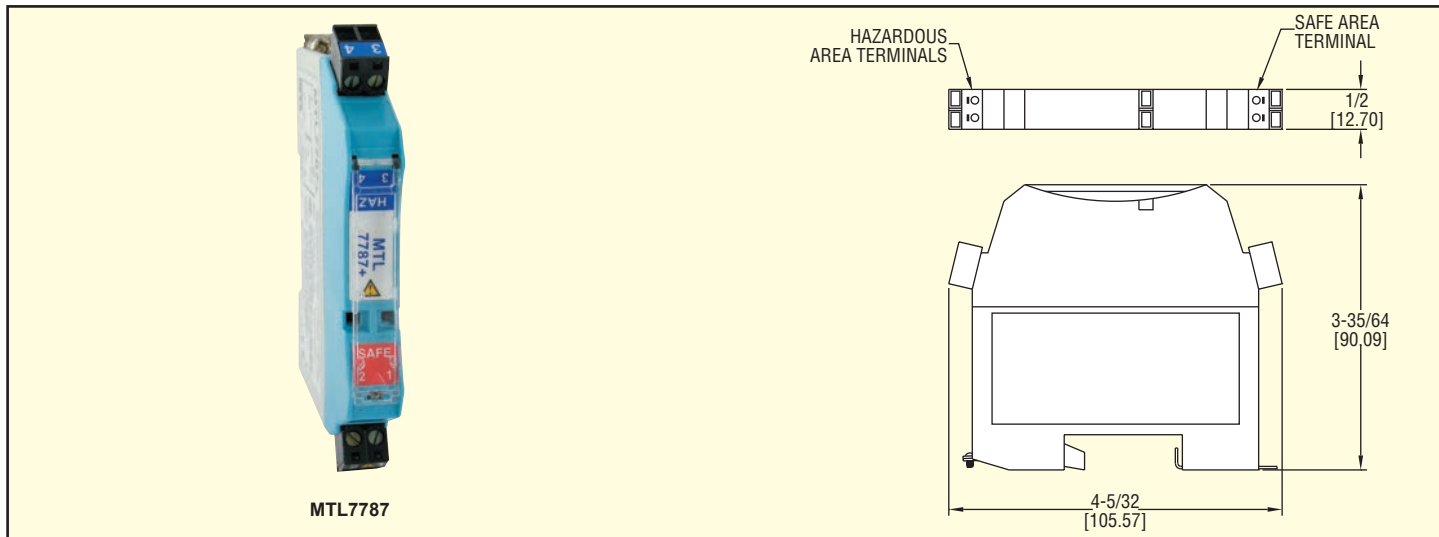

MTL7787

The **MTL7706/7787** is an intrinsically safe (IS) shunt-diode barrier that can be used to communicate with and provide isolations for certain Dwyer® transmitters approved for use in hazardous areas. These barriers limit the amount of energy allowed to pass into the hazardous area, which inhibit ignition in flammable atmospheres.

Compatible Models: 637, 608, SBLTX, PBLTX, IS626

Zener Barrier	Approval	Dwyer Series
MTL7706	UL for Class I; Div. 1 Groups A, B, C, D CL II; Div. 1 Groups E, F, G; CL III Div. 1	IS626 SBLTX PBLTX
MTL7706	FM for Class I, II, III; Div. 1 Groups B, C, D, E, F, G	637
MTL7706	FM for Class I, II, III; Div. 1 Groups A, B, C, D, E, F, G	608

MTL7706	FM	
	Group	µF mH
	A & B	0.083 4.2
BASEEFA (ATEX)		
Group	µF	mH
IIC	0.083	4.2

MTL7787	FM	
	Group	µF mH
	A & B	0.083 3.05
BASEEFA (ATEX)		
Group	µF	mH
IIC	0.083	3.05

Region (Authority)	Standard	Approved For	Certificate/ File no.
USA (FM) (UL)	3600, 3610 entity 3611, 3810 UL698, UL913 UL1604	AIS/I,II,III/1/Entity ABCDEFG-SCI-942; NI/II/@/ABCD/T4 [I/0] AEx[ia]IIC-SCI-942 Entity; NI/1/2/IIC/T4; Ta=140°F (60°C)	3010737
Canada (CSA)	CAN/CSA E60070, IEC60079, C22.2	Class I, Div.2, Gps A, B, C, D; Ex nA [iA] IIC T4 Class I, Xone 2, Aex nA IIC T4	1345550
UK (BASEEFA)	EN 50014, EN 50020	EEEx ia IIC	BAS01ATEX7217
UK (BASEEFA) Systems	EN 50039	EEEx ia IIC	Ex01E2219

SPECIFICATIONS

Transmitter Voltage: 16.2 V at 20 mA with 250Ω load (negative w.r.t. earth); 11.0 V at 20 mA with 500Ω load (negative w.r.t. earth).

Safe Area Output: 4 to 20 mA.

Load Resistance: 0 to 500 Ω.

Power Requirement: 20 to 35 VDC w.r.t. earth.

Accuracy: ±2 µA under all conditions.

LED Indicator: Green: Power indication.

Temperature Limits:

Operating: -4 to 140°F (-20 to 60°C);

Storage: -40 to 176°F (-40 to 80°C).

Humidity: 5 to 95% RH.

Terminals: Accommodate up to 2.5 mm² stranded or single-core.

Safety Description: 28 µV, 300Ω, 93 mA.

Weight: 4.9 oz (140 g).

Agency Approvals: See table.

ACCESSORY

A-360, Aluminum DIN Rail 1 m