
DuoTech Accelerometer SLC144

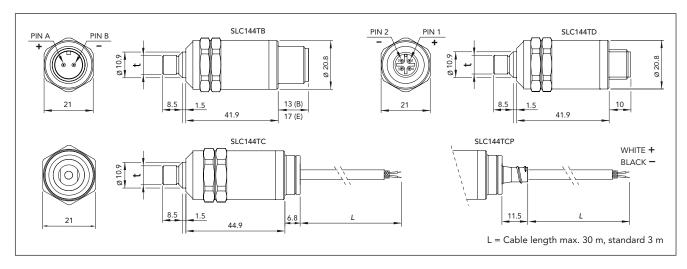

The DuoTech accelerometer is a single transducer solution used for vibration or shock pulse measurements or both in combination. The accelerometer is mounted in a countersunk mounting hole identical to holes normally used by shock pulse transducers.

The housing and base are made of stainless acid proof steel suitable for aggressive environments. The accelerometer is internally isolated in a Faraday shield providing maximum protection from ground loops and RF interference.

Technical specifications

Nom. sensitivity, main axis: Meas. range, vibration: Meas. range, shock pulse: Transverse sensitivity: Base strain sensitivity: Frequency range, vibration: Settling time: Bias point: Power supply: Temperature range: Sealing:

Casing:

Isolation: Mounting thread:


Torque limit: Weight: Connection:


Cable length (integral): Cable type (intgral):

Transducer line:

* Individual value given on the calibration chart.

** Shield not connected to case

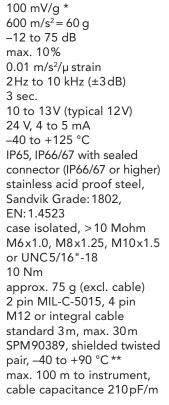



Mounting tools

82053 Countersink with fixed pilot for M8x1.25

- 81027 Holder for countersink
- 81028 Countersink, angle 90°, 12 mm dia.
- 81030 Pilot for M6x1.0
- 81031 Pilot for M8 x1.25
- 81032 Pilot for UNC 5/16"-18
- 81033 Pilot for M10x1.5

To drill the mounting hole, use drill bits 5.0 for M6, 6.6 mm for UNC 5/16", 6.9 mm for M8 or 8.6 for M10. Torque and unscrew the accelerometer with a torque wrench and a long 21 mm socket.

ARTICLE NO: S	$ \begin{array}{c c c c c c c c c c c c c c c c c c c $
A. Part number	SLC144
B . Design	T = Top entry
C . Connection	 B = 2 pin connector MIL-C-5015 C = Integral cable CP= Integral cable, adapter for protection tube D = 4 pin M12 male connector, IEC compliant E = Extended 2 pin connector (17mm)
D. Thread (t)	M6, M8, M10 or UNC
E. Cable length (L)	Desired integral cable length in meters, standard 3m, max. 30m

SERIAL NO: X X X X X X X

Week Number Year

SPM

Find Quality Products Online at:

www.GlobalTestSupply.com

sales@GlobalTestSupply.com